Kahrs Distributed by Power Dekor
Power Dekor (Hong Kong) Ltd.
T: (852) 2522 9977 | F: (852) 2522 9978
E: info@powerdekor.com.hk
W: www.powerdekor.com.hk

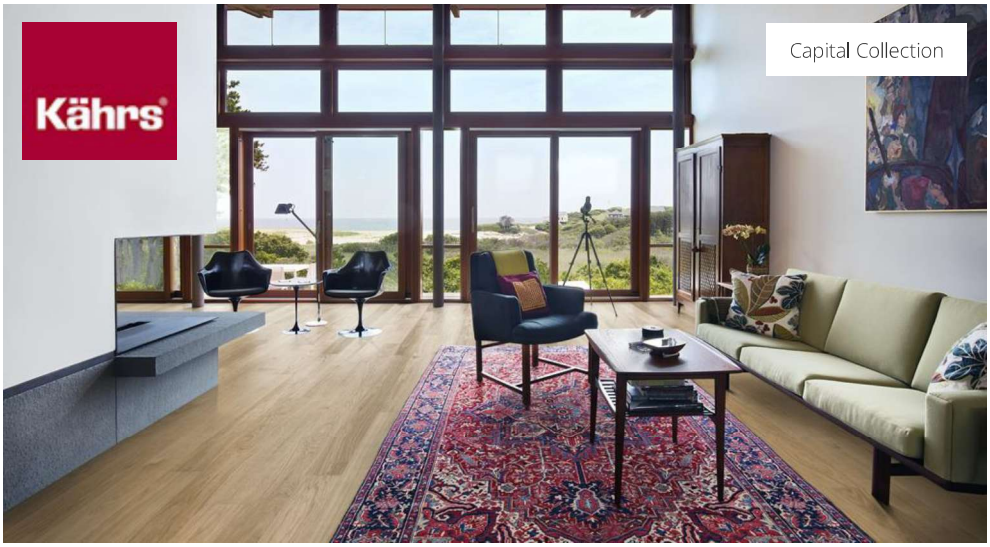

OAK DUBLIN ULTRA MATT 242

The light honey nuances in this single-strip oak floor from the Capital Collection range from faint tan to pale golden brown, giving it an even colouring. Only the finest quality oak timber is used, and each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. The light-absorbing, ultra-matt lacquer finish creates the impression of newly sawn timber, effectively eliminating glare while protecting the wood from daily wear. Four-sided bevelling at the edges ensures a classic, full plank look and feel.

PRODUCT DETAILS

Product type / Construction	Wood Floors / 3-layer parquet
Article Number / EAN Code	151N4AEK04KW240 / 7393969044950
Design / Wood Species	Plank / Oak
Surface treatment / Natural/Stained	Ultra matt lacquer / Natural
Design features	Microbevelled 4-sided, Brushed
Width x Length x Thickness	187 x 2420 x 15 mm
Weight per package / per m2	22 kg / 8.15 kg
Area per package / per pallet	2.72 m^2 / 122.4 m^2
Grading	Calm
Joint	Woodloc® 5S
Installation method	Floating, Glue-down
Floor heating	Yes
Wear leayer material / thickness	Hardwood / 3.5 mm
Resandable	2-3 times
Core material	Pine/Spruce
Hardness (Brinell) value / range	3,7 / 2.2 - 5.9

PRODUCT DETAILS

LRV / LRV Std1	33 / 4.7
Warranty	30 years

TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density kg/m^3		>500 kg/m^3
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm^2	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

DETAILED DESCRIPTION

Even colour with minor variations.
Small sized knots in limited numbers allowed.

Ultra matt lacquer: The appearance of the matte surface may vary due to different light sources and angles.

Colour change: Some muting of colour variation to medium, straw brown.

Packages may contain start and stop boards.

Descriptions & Imagery
All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

OAK NOUVEAU GREIGE

The lightly smoked, grey-stain found on this single-strip oak floor from the Classic Nouveau Collection enhance the earth undertones and balance the natural contrasts in the wood. Knots and cracks lightly pepper the boards, adding subtle depth to the floor's elegant expression. Each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. Four-sided micro-bevelling at the edges ensures a classic full plank look and feel. The matt lacquer finish eliminates glare while protecting the wood from daily wear.

PRODUCT DETAILS

Product type / Construction	Wood Floors / 3-layer parquet
Article Number / EAN Code	151N8AEKGGKW220 / 7393969041195
Design / Wood Species	Plank / Oak
Surface treatment / Natural/Stained	Matt lacquer / Stained
Design features	Microbevelled 4-sided, Brushed, Light smoked
Width x Length x Thickness	187 x 2266 x 15 mm
Weight per package / per m2	21 kg / 8.4 kg
Area per package / per pallet	2.54 m^2 / 114.3 m^2
Grading	Lively
Joint	Woodloc® 5S
Installation method	Floating, Glue-down
Floor heating	Yes
Wear leayer material / thickness	Hardwood / 3.5 mm
Resandable	2-3 times
Core material	Pine/Spruce
Hardness (Brinell) value / range	3,7 / 2.2 - 5.9

PRODUCT DETAILS

LRV / LRV Std1 / LRV Std2	24 / 3.1 / 6.2
Warranty	30 years

TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density kg/m^3		>500 kg/m^3
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm^2	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur.
The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

Descriptions & Imagery
All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

OAK PARIS ULTRA MATT 242

The blonde nuances in this white, single-strip floor from the Capital Collection are balanced by an even colour variation between planks. Only the finest quality oak timber is used, and each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. The light-absorbing, ultra-matt lacquer finish creates the impression of newly sawn timber, effectively eliminating glare while protecting the wood from daily wear. Four-sided micro-bevelling at the edges ensures a classic, full plank look and feel.

PRODUCT DETAILS

Product type / Construction	Wood Floors / 3-layer parquet
Article Number / EAN Code	151N4AEK4JKW240 / 7393969046077
Design / Wood Species	Plank / Oak
Surface treatment / Natural/Stained	Ultra matt lacquer / Stained
Design features	Microbevelled 4-sided, Brushed
Width x Length x Thickness	187 x 2420 x 15 mm
Weight per package / per m2	24 kg / 8.82 kg
Area per package / per pallet	2.72 m^2 / 122.4 m^2
Grading	Calm
Joint	Woodloc® 5S
Installation method	Floating, Glue-down
Floor heating	Yes
Wear leayer material / thickness	Hardwood / 3.5 mm
Resandable	2-3 times
Core material	Pine/Spruce
Hardness (Brinell) value / range	3,7 / 2.2 - 5.9

PRODUCT DETAILS

LRV / LRV Std1	38 / 3.5
Warranty	30 years

TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density kg/m^3		>500 kg/m^3
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm^2	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

DETAILED DESCRIPTION

Even colour with minor variations.
Small sized knots in limited numbers allowed.

Ultra matt lacquer: The appearance of the matte surface may vary due to different light sources and angles.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

Descriptions & Imagery
All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

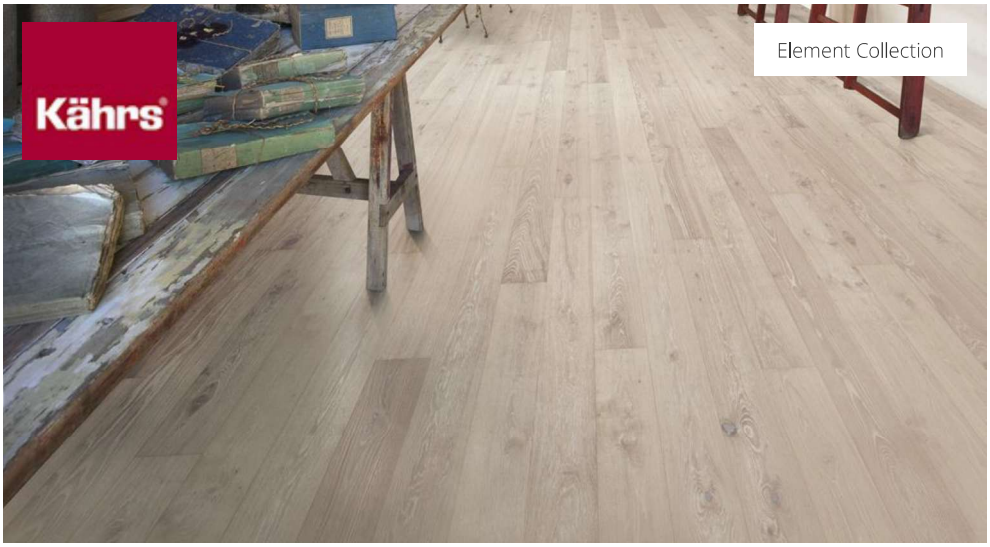

OAK CRISP

The semi-transparent stain on this single-strip, white oak floor from the Element Collection allows the warmer hues to come through, giving the floor a light colour balance and a classically Nordic expression. Each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. Four-sided micro-bevelling at the edges ensures a traditional full plank look and feel. The matt lacquer finish eliminates glare while protecting the wood from daily wear.

PRODUCT DETAILS

Product type / Construction	Wood Floors / 3-layer parquet
Article Number / EAN Code	151N5AEKP1KW240 / 7393969044561
Design / Wood Species	Plank / Oak
Surface treatment / Natural/Stained	Matt lacquer / Stained
Design features	Microbevelled 4-sided, Brushed
Width x Length x Thickness	151 x 2420 x 15 mm
Weight per package / per m2	17.9 kg / 8.14 kg
Area per package / per pallet	2.19 m^2 / 118.26 m^2
Grading	Lively
Joint	Woodloc® 5S
Installation method	Floating, Glue-down
Floor heating	Yes
Wear leayer material / thickness	Hardwood / 3.5 mm
Resandable	2-3 times
Core material	Pine/Spruce/Alder
Hardness (Brinell) value / range	3,7 / 2.2 - 5.9

PRODUCT DETAILS

LRV / LRV Std1	49 / 5.3
Warranty	30 years

TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density kg/m^3		>500 kg/m^3
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm^2	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur. The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.

Colour change: Stained product - noticeable color change over

Packages may contain start and stop boards.

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

OAK PRAGUE 242

The grey notes in this single-strip floor from the Capital Collection are balanced by an even color variation between planks. Only the finest quality oak timber is used, and each board is brushed to bring out the character of the grain and highlight the natural texture of the wood. The light-absorbing, ultra-matt lacquer finish creates the impression of a newly sawn timber, effectively eliminating glare while protecting the wood from daily wear. Four-sided micro-beveling at the edges ensures a classic, full plank look and feel.

PRODUCT DETAILS

Product type / Construction	Wood Floors / 3-layer parquet
Article Number / EAN Code	151N4AEKD4KW240 / 7393969046930
Design / Wood Species	Plank / Oak
Surface treatment / Natural/Stained	Ultra matt lacquer / Stained
Design features	Microbevelled 4-sided, Brushed
Width x Length x Thickness	187 x 2420 x 15 mm
Weight per package / per m2	22 kg / 8.09 kg
Area per package / per pallet	2.72 m^2 / 122.4 m^2
Grading	Calm
Joint	Woodloc® 5S
Installation method	Floating, Glue-down
Floor heating	Yes
Wear leayer material / thickness	Hardwood / 3.5 mm
Resandable	2-3 times
Core material	Pine/Spruce/Alder
Backside material	Spruce

PRODUCT DETAILS

Hardness (Brinell) value / range	3,7 / 2.2 - 5.9
LRV / LRV Std1	29 / 2
Warranty	30 years

TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density kg/m^3		>500 kg/m^3
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm^2	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

DETAILED DESCRIPTION

Even colour with some variations. Small sized knots in limited numbers allowed.

Ultra matt lacquer: The appearance of the matte surface may vary due to different light sources and angles.

Colour change: Stained product - noticeable color change over time.

Packages may contain start and stop boards.

Descriptions & Imagery
All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

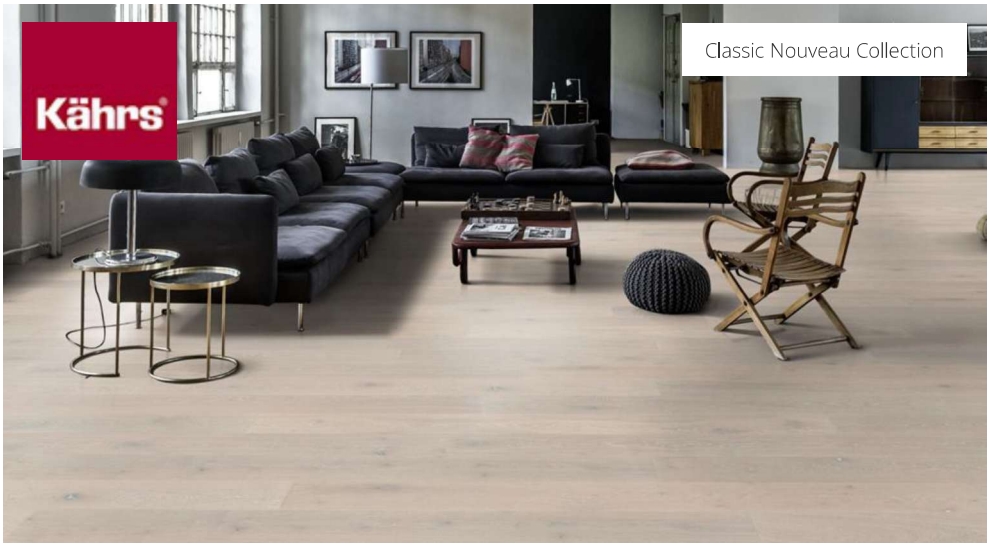

OAK NOUVEAU SNOW

The powder white finish on this single-strip floor from the Classic Nouveau Collection enhances the natural colour variances in the white oak and emphasises the micro bevelling with lustrous detail. Each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. The matt lacquer finish eliminatesglare while protecting the wood from daily wear. Large knots may occur, both white and black.

PRODUCT DETAILS

Product type / Construction	Wood Floors / 3-layer parquet
Article Number / EAN Code	151N8EEK0WKW220 / 7393969047395
Design / Wood Species	Plank / Oak
Surface treatment / Natural/Stained	Matt lacquer / Stained
Design features	Microbevelled 4-sided, Brushed
Width x Length x Thickness	187 x 2266 x 15 mm
Weight per package / per m2	20 kg / 8 kg
Area per package / per pallet	2.54 m^2 / 114.3 m^2
Grading	Lively
Joint	Woodloc® 5S
Installation method	Floating, Glue-down
Floor heating	Yes
Wear leayer material / thickness	Hardwood / 3.5 mm
Resandable	2-3 times
Core material	Pine/Spruce
Hardness (Brinell) value / range	3,7 / 2.2 - 5.9

PRODUCT DETAILS

LRV / LRV Std1 / LRV Std2	58 / 4.5 / 9
Warranty	30 years

TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density kg/m^3		>500 kg/m^3
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm^2	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur.
The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

Descriptions & Imagery
All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

OAK BERLIN 226

The lightly smoked finish in this exclusive, single-strip oak floor from the Capital Collection beautifully balances its soft grey and pale ash colour palette. Only the finest quality oak timber is used, and each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. Four-sided bevelling at the edges ensures a classic full plank look and feel.

PRODUCT DETAILS

Product type / Construction	Wood Floors / 3-layer parquet
Article Number / EAN Code	151N4AEKFMKW220 / 7393969041133
Design / Wood Species	Plank / Oak
Surface treatment / Natural/Stained	Oil / Stained
Design features	Microbevelled 4-sided, Brushed, Light smoked
Width x Length x Thickness	187 x 2266 x 15 mm
Weight per package / per m2	21 kg / 8.4 kg
Area per package / per pallet	2.54 m^2 / 114.3 m^2
Grading	Calm
Joint	Woodloc® 5S
Installation method	Floating, Glue-down
Floor heating	Yes
Wear leayer material / thickness	Hardwood / 3.5 mm
Resandable	2-3 times
Core material	Pine/Spruce
Hardness (Brinell) value / range	3,7 / 2.2 - 5.9

PRODUCT DETAILS

LRV / LRV Std1	24 / 2.9
Warranty	30 years

TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density kg/m^3		>500 kg/m^3
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm^2	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

DETAILED DESCRIPTION

Even colour with minor variations.
Small sized knots in limited numbers allowed.

Oil: This floor should be oiled immediately after installation.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

Descriptions & Imagery
All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.